


金属化聚丙烯膜电容器 Metallized polypropylene film capacitor(Box-type)

■ 外形图 Outline Drawing

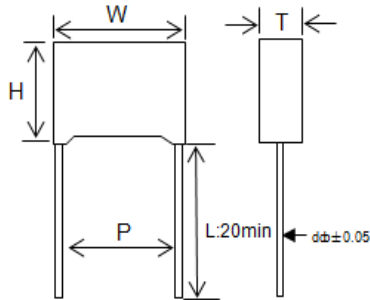

■ 特点

- 高频损耗小
- 内部温升小, 耐高温
- 塑料外壳 (UL94 V-0), 阻燃环氧填充

■ Features

- Low loss at high frequency
- Small inherent temperature rise, high temperature rang
- Plastic case (UL94 V-0), Epoxy resin sealing

■ 主要用途

- 高压大电流的脉冲电路
- 电子照明 (如电子镇流器、E-HID)
- 高频交流负荷

■ Typical Application

- Pulse applications with high A.C. voltage and high current
- Electric lighting(i.e. Electric ballast, E-HID)
- High-frequency A.C. loads


■ 技术要求 Specifications

引用标准 Reference Standard	GB/T 14579(IEC 60384-17)				
气候类别 Climatic Category	55/125/56				
额定温度 Rated temperature	105°C				
工作温度范围 Operating temperature	-55°C~125°C (+105°C to +125°C: decreasing factor 1.25% per °C for VR(dc))				
额定电压 Rated Voltage	400Vac,500Vac,600Vac,700Vac,900Vac				
电容量范围 Capacitance Range	0.00047 ~ 0.15 μ F				
电容量偏差 Capacitance Tolerance	$\pm 3\%$ (H), $\pm 5\%$ (J), $\pm 10\%$ (K)				
耐电压 Voltage Proof	1.6UR (5s)				
损耗角正切 Dissipation Factor	$\leq 10 \times 10^{-4}$ (20°C, 1kHz)				
绝缘电阻 Insulation Resistance	$\geq 100\ 000\ \Omega$, (20°C, 100V, 1min)				
最大脉冲爬升速率 Maximum Pulse Rise Time (dv/dt) 若实际工作电压 U 比额定电压 UR 低, 电容器可工作在更高的 dv/dt 场合。这样 dv/dt 允许值为右表值乘 UR/U。	UR(V)	dv/dt (V/ μ s)			
		P=7.5	P=10	P=15	P=22.5
	400	3 000	2 200	2 000	800
	500	4 000	3 000	2 500	1 200
	600	6 500	6 000	4 500	1 800
	700	--	9 800	9 500	4 500
900	--	--	10 000	6 000	

产品代码说明 Part number system

■ 18 位产品代码说明如下:

The 18 digits part number is formed as follow:



W 2 9

第 1~3 位: 型号代码

W29=MKP23

第 4~5 位: 交流额定电压

G2=400V H2=500V U1=600V
V1=700V X1=900V

第 6~8 位: 标称容量

举例 : 104 = 10×10^4 PF = 0.1 μ f

第 9 位: 容量偏差

H=±3% J=±5%, K=±10%

第 10 位: 引线脚距

J=7.5mm K=10mm
M=15mm Q=22.5mm

第 11 位: 引线线径

6= CP 0.6mm 7= CP 0.7mm
8= CP 0.8mm 1= CU 1.0mm
9= CU 0.8mm 2= CU 0.5mm
3= CU 0.6mm 4= CU 0.7mm

第 12 位: 引线加工和包装代码

L= 直脚 K= 引线成型
T= 弹带包装

第 13~18 位: 内部特征码

Digit 1 to 3: Series code

W29=MKP23

Digit 4 to 5: AC rated voltage

G2=400V H2=500V U1=600V
V1=700V X1=900V

Digit 6 to 8: Rated capacitance

For example: 104 = 10×10^4 PF = 0.1 μ f

Digit 9: Capacitance tolerance

H=±3% J=±5%, K=±10%

Digit 10: Pitch

J=7.5mm K=10mm
M=15mm Q=22.5mm

Digit 11: Lead Wire diameter

6= CP 0.6mm 7= CP 0.7mm
8= CP 0.8mm 1= CU 1.0mm
9= CU 0.8mm 2= CU 0.5mm
3= CU 0.6mm 4= CU 0.7mm

Digit 12: Lead form and packaging code

L= straight lead K= Lead kinked
T= ammo-pack

Digit 13 to 18: Internal use

■ 外形尺寸 Dimensions (mm)

400Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.00082	10.5	9.0	4.0	7.5	0.6	W29G2821-J6*****
0.0010	10.5	9.0	4.0	7.5	0.6	W29G2102-J6*****
0.0012	10.5	9.0	4.0	7.5	0.6	W29G2122-J6*****
0.0015	10.5	9.0	4.0	7.5	0.6	W29G2152-J6*****
0.0018	10.5	9.0	4.0	7.5	0.6	W29G2182-J6*****
0.0022	10.5	9.0	4.0	7.5	0.6	W29G2222-J6*****
0.0027	10.5	9.0	4.0	7.5	0.6	W29G2272-J6*****
0.0033	10.5	9.0	4.0	7.5	0.6	W29G2332-J6*****
0.0036	10.5	9.0	4.0	7.5	0.6	W29G2362-J6*****
0.0039	10.5	9.0	4.0	7.5	0.6	W29G2392-J6*****
0.0047	10.5	9.0	4.0	7.5	0.6	W29G2472-J6*****
0.0056	10.5	11.0	5.0	7.5	0.6	W29G2562-J6*****
0.0068	10.5	11.0	5.0	7.5	0.6	W29G2682-J6*****
0.0082	10.5	11.0	5.0	7.5	0.6	W29G2822-J6*****
0.010	10.5	12.0	6.0	7.5	0.6	W29G2103-J6*****
0.012	10.5	12.0	6.0	7.5	0.6	W29G2123-J6*****
0.0010	13.0	9.0	4.0	10.0	0.6	W29G2102-K6*****
0.0012	13.0	9.0	4.0	10.0	0.6	W29G2122-K6*****
0.0015	13.0	9.0	4.0	10.0	0.6	W29G2152-K6*****
0.0018	13.0	9.0	4.0	10.0	0.6	W29G2182-K6*****
0.0022	13.0	9.0	4.0	10.0	0.6	W29G2222-K6*****
0.0027	13.0	9.0	4.0	10.0	0.6	W29G2272-K6*****
0.0033	13.0	9.0	4.0	10.0	0.6	W29G2332-K6*****
0.0039	13.0	9.0	4.0	10.0	0.6	W29G2392-K6*****
0.0047	13.0	11.0	5.0	10.0	0.6	W29G2472-K6*****
0.0056	13.0	11.0	5.0	10.0	0.6	W29G2562-K6*****
0.0068	13.0	11.0	5.0	10.0	0.6	W29G2682-K6*****
0.0082	13.0	12.0	6.0	10.0	0.6	W29G2822-K6*****
0.010	13.0	12.0	6.0	10.0	0.6	W29G2103-K6*****

400Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0022	18.0	11.0	5.0	15.0	0.8	W29G2222-M8*****
0.0027	18.0	11.0	5.0	15.0	0.8	W29G2272-M8*****
0.0033	18.0	11.0	5.0	15.0	0.8	W29G2332-M8*****
0.0039	18.0	11.0	5.0	15.0	0.8	W29G2392-M8*****
0.0047	18.0	11.0	5.0	15.0	0.8	W29G2472-M8*****
0.0056	18.0	11.0	5.0	15.0	0.8	W29G2562-M8*****
0.0068	18.0	11.0	5.0	15.0	0.8	W29G2682-M8*****
0.0082	18.0	11.0	5.0	15.0	0.8	W29G2822-M8*****
0.010	18.0	11.0	5.0	15.0	0.8	W29G2103-M8*****
0.012	18.0	11.0	5.0	15.0	0.8	W29G2123-M8*****
0.015	18.0	12.0	6.0	15.0	0.8	W29G2153-M8*****
0.018	18.0	12.0	6.0	15.0	0.8	W29G2183-M8*****
0.022	18.0	13.5	7.5	15.0	0.8	W29G2223-M8*****
0.027	18.0	13.5	7.5	15.0	0.8	W29G2273-M8*****
0.033	18.0	14.5	8.5	15.0	0.8	W29G2333-M8*****
0.039	18.0	16.0	10.0	15.0	0.8	W29G2393-M8*****
0.047	18.0	16.0	10.0	15.0	0.8	W29G2473-M8*****
0.056	18.0	19.0	11.0	15.0	0.8	W29G2563-M8*****
0.068	18.0	19.0	11.0	15.0	0.8	W29G2683-M8*****
0.018	26.5	15.0	6.0	22.5	0.8	W29G2183-Q8*****
0.022	26.5	15.0	6.0	22.5	0.8	W29G2223-Q8*****
0.027	26.5	15.0	6.0	22.5	0.8	W29G2273-Q8*****
0.033	26.5	15.0	6.0	22.5	0.8	W29G2333-Q8*****
0.039	26.5	15.0	6.0	22.5	0.8	W29G2393-Q8*****
0.047	26.5	16.0	7.0	22.5	0.8	W29G2473-Q8*****
0.056	26.5	16.0	7.0	22.5	0.8	W29G2563-Q8*****
0.068	26.5	17.0	8.5	22.5	0.8	W29G2683-Q8*****
0.082	26.5	17.0	8.5	22.5	0.8	W29G2823-Q8*****
0.10	26.5	18.5	10.0	22.5	0.8	W29G2104-Q8*****
0.12	26.5	22.0	12.0	22.5	0.8	W29G2124-Q8*****
0.15	26.5	22.0	12.0	22.5	0.8	W29G2154-Q8*****

备注: 1. "-" 表示容量偏差。"- " = capacitance tolerance code, M=±20%,K=±10%,J=±5%,H=±3%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack

■ 外形尺寸 Dimensions (mm)

500Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.00056	10.5	9.0	4.0	7.5	0.6	W29H2561-J6*****
0.00062	10.5	9.0	4.0	7.5	0.6	W29H2621-J6*****
0.00068	10.5	9.0	4.0	7.5	0.6	W29H2681-J6*****
0.00082	10.5	9.0	4.0	7.5	0.6	W29H2821-J6*****
0.0010	10.5	9.0	4.0	7.5	0.6	W29H2102-J6*****
0.0012	10.5	9.0	4.0	7.5	0.6	W29H2122-J6*****
0.0015	10.5	9.0	4.0	7.5	0.6	W29H2152-J6*****
0.0018	10.5	9.0	4.0	7.5	0.6	W29H2182-J6*****
0.0022	10.5	11.0	5.0	7.5	0.6	W29H2222-J6*****
0.0027	10.5	11.0	5.0	7.5	0.6	W29H2272-J6*****
0.0033	10.5	11.0	5.0	7.5	0.6	W29H2332-J6*****
0.0036	10.5	12.0	6.0	7.5	0.6	W29H2362-J6*****
0.0039	10.5	12.0	6.0	7.5	0.6	W29H2392-J6*****
0.0047	10.5	12.0	6.0	7.5	0.6	W29H2472-J6*****
0.0056	10.5	12.0	6.0	7.5	0.6	W29H2562-J6*****
0.0010	13.0	9.0	4.0	10.0	0.6	W29H2102-K6*****
0.0012	13.0	9.0	4.0	10.0	0.6	W29H2122-K6*****
0.0015	13.0	9.0	4.0	10.0	0.6	W29H2152-K6*****
0.0018	13.0	9.0	4.0	10.0	0.6	W29H2182-K6*****
0.0022	13.0	9.0	4.0	10.0	0.6	W29H2222-K6*****
0.0027	13.0	9.0	4.0	10.0	0.6	W29H2272-K6*****
0.0030	13.0	9.0	4.0	10.0	0.6	W29H2302-K6*****
0.0033	13.0	9.0	4.0	10.0	0.6	W29H2332-K6*****
0.0039	13.0	11.0	5.0	10.0	0.6	W29H2392-K6*****
0.0047	13.0	11.0	5.0	10.0	0.6	W29H2472-K6*****
0.0056	13.0	11.0	5.0	10.0	0.6	W29H2562-K6*****
0.0068	13.0	12.0	6.0	10.0	0.6	W29H2682-K6*****
0.0082	13.0	12.0	6.0	10.0	0.6	W29H2822-K6*****
0.010	13.0	13.0	7.0	10.0	0.6	W29H2103-K6*****
0.012	13.0	14.0	8.0	10.0	0.6	W29H2123-K6*****

500Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0033	18.0	11.0	5.0	15.0	0.8	W29H2332-M8*****
0.0036	18.0	11.0	5.0	15.0	0.8	W29H2362-M8*****
0.0039	18.0	11.0	5.0	15.0	0.8	W29H2392-M8*****
0.0047	18.0	11.0	5.0	15.0	0.8	W29H2472-M8*****
0.0056	18.0	11.0	5.0	15.0	0.8	W29H2562-M8*****
0.0068	18.0	11.0	5.0	15.0	0.8	W29H2682-M8*****
0.0082	18.0	11.0	5.0	15.0	0.8	W29H2822-M8*****
0.010	18.0	11.0	5.0	15.0	0.8	W29H2103-M8*****
0.012	18.0	12.0	6.0	15.0	0.8	W29H2123-M8*****
0.015	18.0	12.0	6.0	15.0	0.8	W29H2153-M8*****
0.018	18.0	13.5	7.5	15.0	0.8	W29H2183-M8*****
0.022	18.0	13.5	7.5	15.0	0.8	W29H2223-M8*****
0.027	18.0	13.5	7.5	15.0	0.8	W29H2273-M8*****
0.030	18.0	14.5	8.5	15.0	0.8	W29H2303-M8*****
0.033	18.0	16.0	10.0	15.0	0.8	W29H2333-M8*****
0.036	18.0	16.0	10.0	15.0	0.8	W29H2363-M8*****
0.039	18.0	16.0	10.0	15.0	0.8	W29H2393-M8*****
0.047	18.0	19.0	11.0	15.0	0.8	W29H2473-M8*****
0.056	18.0	19.0	11.0	15.0	0.8	W29H2563-M8*****
0.010	26.5	15.0	6.0	22.5	0.8	W29H2103-Q8*****
0.012	26.5	15.0	6.0	22.5	0.8	W29H2123-Q8*****
0.015	26.5	15.0	6.0	22.5	0.8	W29H2153-Q8*****
0.018	26.5	15.0	6.0	22.5	0.8	W29H2183-Q8*****
0.022	26.5	15.0	6.0	22.5	0.8	W29H2223-Q8*****
0.027	26.5	15.0	6.0	22.5	0.8	W29H2273-Q8*****
0.033	26.5	16.0	7.0	22.5	0.8	W29H2333-Q8*****
0.036	26.5	16.0	7.0	22.5	0.8	W29H2363-Q8*****
0.039	26.5	16.0	7.0	22.5	0.8	W29H2393-Q8*****
0.047	26.5	17.0	8.5	22.5	0.8	W29H2473-Q8*****
0.056	26.5	17.0	8.5	22.5	0.8	W29H2563-Q8*****
0.068	26.5	18.5	10.0	22.5	0.8	W29H2683-Q8*****
0.082	26.5	18.5	10.0	22.5	0.8	W29H2823-Q8*****
0.10	26.5	22.0	12.0	22.5	0.8	W29H2104-Q8*****
0.12	26.5	22.0	12.0	22.5	0.8	W29H2124-Q8*****

备注: 1. "-" 表示容量偏差。"- " = capacitance tolerance code, M=±20%,K=±10%,J=±5%,H=±3%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack

■ 外形尺寸 Dimensions (mm)

600Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.00047	10.5	9.0	4.0	7.5	0.6	W29U1471-J6*****
0.00056	10.5	9.0	4.0	7.5	0.6	W29U1561-J6*****
0.00062	10.5	9.0	4.0	7.5	0.6	W29U1621-J6*****
0.00068	10.5	9.0	4.0	7.5	0.6	W29U1681-J6*****
0.00082	10.5	9.0	4.0	7.5	0.6	W29U1821-J6*****
0.0010	10.5	9.0	4.0	7.5	0.6	W29U1102-J6*****
0.0012	10.5	9.0	4.0	7.5	0.6	W29U1122-J6*****
0.0015	10.5	9.0	4.0	7.5	0.6	W29U1152-J6*****
0.0018	10.5	11.0	5.0	7.5	0.6	W29U1182-J6*****
0.0022	10.5	11.0	5.0	7.5	0.6	W29U1222-J6*****
0.0027	10.5	11.0	5.0	7.5	0.6	W29U1272-J6*****
0.0033	10.5	12.0	6.0	7.5	0.6	W29U1332-J6*****
0.0036	10.5	12.0	6.0	7.5	0.6	W29U1362-J6*****
0.0039	10.5	12.0	6.0	7.5	0.6	W29U1392-J6*****
0.0047	10.5	12.0	6.0	7.5	0.6	W29U1472-J6*****
0.00056	13.0	9.0	4.0	10.0	0.6	W29U1561-K6*****
0.00062	13.0	9.0	4.0	10.0	0.6	W29U1621-K6*****
0.00068	13.0	9.0	4.0	10.0	0.6	W29U1681-K6*****
0.00082	13.0	9.0	4.0	10.0	0.6	W29U1821-K6*****
0.0010	13.0	9.0	4.0	10.0	0.6	W29U1102-K6*****
0.0011	13.0	9.0	4.0	10.0	0.6	W29U1112-K6*****
0.0012	13.0	9.0	4.0	10.0	0.6	W29U1122-K6*****
0.0013	13.0	9.0	4.0	10.0	0.6	W29U1132-K6*****
0.0015	13.0	9.0	4.0	10.0	0.6	W29U1152-K6*****
0.0017	13.0	9.0	4.0	10.0	0.6	W29U1172-K6*****
0.0018	13.0	9.0	4.0	10.0	0.6	W29U1182-K6*****
0.0020	13.0	9.0	4.0	10.0	0.6	W29U1202-K6*****
0.0022	13.0	9.0	4.0	10.0	0.6	W29U1222-K6*****
0.0027	13.0	9.0	4.0	10.0	0.6	W29U1272-K6*****
0.0030	13.0	9.0	4.0	10.0	0.6	W29U1302-K6*****
0.0033	13.0	9.0	4.0	10.0	0.6	W29U1332-K6*****
0.0036	13.0	11.0	5.0	10.0	0.6	W29U1362-K6*****
0.0039	13.0	11.0	5.0	10.0	0.6	W29U1392-K6*****
0.0047	13.0	11.0	5.0	10.0	0.6	W29U1472-K6*****
0.0056	13.0	11.0	5.0	10.0	0.6	W29U1562-K6*****
0.0068	13.0	12.0	6.0	10.0	0.6	W29U1682-K6*****
0.0082	13.0	12.0	6.0	10.0	0.6	W29U1822-K6*****
0.010	13.0	13.0	7.0	10.0	0.6	W29U1103-K6*****
0.012	13.0	14.0	8.0	10.0	0.6	W29U1123-K6*****

600Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.0010	18.0	11.0	5.0	15.0	0.8	W29U1102-M8*****
0.0012	18.0	11.0	5.0	15.0	0.8	W29U1122-M8*****
0.0015	18.0	11.0	5.0	15.0	0.8	W29U1152-M8*****
0.0018	18.0	11.0	5.0	15.0	0.8	W29U1182-M8*****
0.0022	18.0	11.0	5.0	15.0	0.8	W29U1222-M8*****
0.0027	18.0	11.0	5.0	15.0	0.8	W29U1272-M8*****
0.0033	18.0	11.0	5.0	15.0	0.8	W29U1332-M8*****
0.0039	18.0	11.0	5.0	15.0	0.8	W29U1392-M8*****
0.0047	18.0	11.0	5.0	15.0	0.8	W29U1472-M8*****
0.0056	18.0	11.0	5.0	15.0	0.8	W29U1562-M8*****
0.0068	18.0	11.0	5.0	15.0	0.8	W29U1682-M8*****
0.0082	18.0	12.0	6.0	15.0	0.8	W29U1822-M8*****
0.010	18.0	12.0	6.0	15.0	0.8	W29U1103-M8*****
0.012	18.0	12.0	6.0	15.0	0.8	W29U1123-M8*****
0.015	18.0	13.5	7.5	15.0	0.8	W29U1153-M8*****
0.018	18.0	13.5	7.5	15.0	0.8	W29U1183-M8*****
0.022	18.0	14.5	8.5	15.0	0.8	W29U1223-M8*****
0.027	18.0	16.0	10.0	15.0	0.8	W29U1273-M8*****
0.033	18.0	16.0	10.0	15.0	0.8	W29U1333-M8*****
0.039	18.0	19.0	11.0	15.0	0.8	W29U1393-M8*****
0.047	18.0	19.0	11.0	15.0	0.8	W29U1473-M8*****
0.015	26.5	15.0	6.0	22.5	0.8	W29U1153-Q8*****
0.018	26.5	15.0	6.0	22.5	0.8	W29U1183-Q8*****
0.022	26.5	15.0	6.0	22.5	0.8	W29U1223-Q8*****
0.027	26.5	16.0	7.0	22.5	0.8	W29U1273-Q8*****
0.033	26.5	16.0	7.0	22.5	0.8	W29U1333-Q8*****
0.039	26.5	17.0	8.5	22.5	0.8	W29U1393-Q8*****
0.047	26.5	18.5	10.0	22.5	0.8	W29U1473-Q8*****
0.056	26.5	18.5	10.0	22.5	0.8	W29U1563-Q8*****
0.068	26.5	22.0	12.0	22.5	0.8	W29U1683-Q8*****
0.082	26.5	22.0	12.0	22.5	0.8	W29U1823-Q8*****
0.10	26.5	22.0	12.0	22.5	0.8	W29U1104-Q8*****

备注: 1. "-" 表示容量偏差。"- " = capacitance tolerance code, M=±20%,K=±10%,J=±5%, H=±3%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack

■ 外形尺寸 Dimensions (mm)

700Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.00056	13.0	9.0	4.0	10.0	0.6	W29V1561-K6*****
0.00062	13.0	9.0	4.0	10.0	0.6	W29V1621-K6*****
0.00068	13.0	9.0	4.0	10.0	0.6	W29V1681-K6*****
0.00082	13.0	9.0	4.0	10.0	0.6	W29V1821-K6*****
0.0010	13.0	9.0	4.0	10.0	0.6	W29V1102-K6*****
0.0012	13.0	9.0	4.0	10.0	0.6	W29V1122-K6*****
0.0015	13.0	11.0	5.0	10.0	0.6	W29V1152-K6*****
0.0018	13.0	11.0	5.0	10.0	0.6	W29V1182-K6*****
0.0022	13.0	11.0	5.0	10.0	0.6	W29V1222-K6*****
0.0027	13.0	11.0	5.0	10.0	0.6	W29V1272-K6*****
0.0033	13.0	12.0	6.0	10.0	0.6	W29V1332-K6*****
0.0036	13.0	12.0	6.0	10.0	0.6	W29V1362-K6*****
0.0039	13.0	12.0	6.0	10.0	0.6	W29V1392-K6*****
0.0047	13.0	13.0	7.0	10.0	0.6	W29V1472-K6*****
0.0056	13.0	13.0	7.0	10.0	0.6	W29V1562-K6*****
0.0068	13.0	14.0	8.0	10.0	0.6	W29V1682-K6*****
0.0082	13.0	14.0	8.0	10.0	0.6	W29V1822-K6*****
0.00056	18.0	11.0	5.0	15.0	0.8	W29V1561-M8*****
0.00062	18.0	11.0	5.0	15.0	0.8	W29V1621-M8*****
0.00068	18.0	11.0	5.0	15.0	0.8	W29V1681-M8*****
0.00082	18.0	11.0	5.0	15.0	0.8	W29V1821-M8*****
0.0010	18.0	11.0	5.0	15.0	0.8	W29V1102-M8*****
0.0012	18.0	11.0	5.0	15.0	0.8	W29V1122-M8*****
0.0015	18.0	11.0	5.0	15.0	0.8	W29V1152-M8*****
0.0018	18.0	11.0	5.0	15.0	0.8	W29V1182-M8*****
0.0022	18.0	11.0	5.0	15.0	0.8	W29V1222-M8*****
0.0027	18.0	11.0	5.0	15.0	0.8	W29V1272-M8*****
0.0033	18.0	11.0	5.0	15.0	0.8	W29V1332-M8*****
0.0039	18.0	11.0	5.0	15.0	0.8	W29V1392-M8*****
0.0047	18.0	11.0	5.0	15.0	0.8	W29V1472-M8*****
0.0056	18.0	12.0	6.0	15.0	0.8	W29V1562-M8*****
0.0068	18.0	12.0	6.0	15.0	0.8	W29V1682-M8*****
0.0082	18.0	13.5	7.5	15.0	0.8	W29V1822-M8*****
0.010	18.0	13.5	7.5	15.0	0.8	W29V1103-M8*****
0.012	18.0	14.5	8.5	15.0	0.8	W29V1123-M8*****
0.015	18.0	14.5	8.5	15.0	0.8	W29V1153-M8*****
0.018	18.0	16.0	10.0	15.0	0.8	W29V1183-M8*****
0.022	18.0	19.0	11.0	15.0	0.8	W29V1223-M8*****
0.0068	26.5	15.0	6.0	22.5	0.8	W29V1682-Q8*****
0.0082	26.5	15.0	6.0	22.5	0.8	W29V1822-Q8*****
0.010	26.5	15.0	6.0	22.5	0.8	W29V1103-Q8*****
0.012	26.5	15.0	6.0	22.5	0.8	W29V1123-Q8*****
0.015	26.5	15.0	6.0	22.5	0.8	W29V1153-Q8*****
0.018	26.5	16.0	7.0	22.5	0.8	W29V1183-Q8*****
0.022	26.5	17.0	8.5	22.5	0.8	W29V1223-Q8*****
0.027	26.5	17.0	8.5	22.5	0.8	W29V1273-Q8*****
0.033	26.5	18.5	10.0	22.5	0.8	W29V1333-Q8*****
0.039	26.5	18.5	10.0	22.5	0.8	W29V1393-Q8*****
0.047	26.5	22.0	12.0	22.5	0.8	W29V1473-Q8*****
0.056	26.5	22.0	12.0	22.5	0.8	W29V1563-Q8*****

900Vac						
Cn (μ F)	W max	H max	T max	P	d	Part number
0.00056	18.0	11.0	5.0	15.0	0.8	W29X1561-M8*****
0.00068	18.0	11.0	5.0	15.0	0.8	W29X1681-M8*****
0.00082	18.0	11.0	5.0	15.0	0.8	W29X1821-M8*****
0.0010	18.0	11.0	5.0	15.0	0.8	W29X1102-M8*****
0.0012	18.0	11.0	5.0	15.0	0.8	W29X1122-M8*****
0.0015	18.0	11.0	5.0	15.0	0.8	W29X1152-M8*****
0.0018	18.0	11.0	5.0	15.0	0.8	W29X1182-M8*****
0.0022	18.0	11.0	5.0	15.0	0.8	W29X1222-M8*****
0.0027	18.0	11.0	5.0	15.0	0.8	W29X1272-M8*****
0.0033	18.0	11.0	5.0	15.0	0.8	W29X1332-M8*****
0.0039	18.0	12.0	6.0	15.0	0.8	W29X1392-M8*****
0.0047	18.0	12.0	6.0	15.0	0.8	W29X1472-M8*****
0.0056	18.0	12.0	6.0	15.0	0.8	W29X1562-M8*****
0.0068	18.0	13.5	7.5	15.0	0.8	W29X1682-M8*****
0.0082	18.0	13.5	7.5	15.0	0.8	W29X1822-M8*****
0.010	18.0	14.5	8.5	15.0	0.8	W29X1103-M8*****
0.012	18.0	16.0	10.0	15.0	0.8	W29X1123-M8*****
0.015	18.0	16.0	10.0	15.0	0.8	W29X1153-M8*****
0.018	18.0	19.0	11.0	15.0	0.8	W29X1183-M8*****
0.0022	26.5	15.0	6.0	22.5	0.8	W29X1222-Q8*****
0.0027	26.5	15.0	6.0	22.5	0.8	W29X1272-Q8*****
0.0033	26.5	15.0	6.0	22.5	0.8	W29X1332-Q8*****
0.0039	26.5	15.0	6.0	22.5	0.8	W29X1392-Q8*****
0.0047	26.5	15.0	6.0	22.5	0.8	W29X1472-Q8*****
0.0056	26.5	15.0	6.0	22.5	0.8	W29X1562-Q8*****
0.0068	26.5	15.0	6.0	22.5	0.8	W29X1682-Q8*****
0.0082	26.5	15.0	6.0	22.5	0.8	W29X1822-Q8*****
0.010	26.5	16.0	7.0	22.5	0.8	W29X1103-Q8*****
0.012	26.5	16.0	7.0	22.5	0.8	W29X1123-Q8*****
0.015	26.5	17.0	8.5	22.5	0.8	W29X1153-Q8*****
0.018	26.5	18.5	10.0	22.5	0.8	W29X1183-Q8*****
0.022	26.5	18.5	10.0	22.5	0.8	W29X1223-Q8*****
0.027	26.5	22.0	12.0	22.5	0.8	W29X1273-Q8*****
0.033	26.5	22.0	12.0	22.5	0.8	W29X1333-Q8*****

备注: 1. "-" 表示容量偏差。"- " = capacitance tolerance code, M=±20%,K=±10%,J=±5%, H=±3%

2. 第 12 位表示引线加工和包装代码, L= 直脚 straight lead K= 引线成型 Lead kinked T= 弹带包装 ammo-pack