

Depletion-Mode Power MOSFET

General Features


- Depletion Mode (Normally On)
- Proprietary Advanced Planar Technology
- Rugged Polysilicon Gate Cell Structure
- RoHS Compliant
- Halogen-free Available

BV_{DSX}	$R_{DS(ON)(Max.)}$	I_D
450V	2Ω	3.75A

TO-252

Applications

- Transient Protect
- Start-up
- Converters
- Normally On Switches
- LED Drive Circuits
- Power Supplies
- Current Source
- Voltage Source

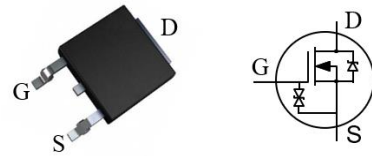

Ordering Information

Part Number	Package	Marking	Remark
DMD4523E	TO-252	4523E	Halogen Free

Absolute Maximum Ratings

$T_A=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	DMD4523E	Unit
V_{DSX}	Drain-to-Source Voltage ^[1]	450	V
V_{DGX}	Drain-to-Gate Voltage ^[1]	450	V
I_D	Continuous Drain Current	3.75	A
I_{DM}	Pulsed Drain Current ^[2]	15	
P_D	Power Dissipation	36	W
V_{GS}	Gate-to-Source Voltage	±20	V
V_{ESD}	Gate Source ESD ^[3]	3000	V
	Source to Gate ESD ^[3]	3000	V
T_L	Soldering Temperature	300	°C
	Distance of 1.6mm from case for 10 seconds		
T_J and T_{STG}	Operating and Storage Temperature Range	-55 to 150	

Caution: Stresses greater than those listed in the "Absolute Maximum Ratings" may cause permanent damage to the device.

Thermal Characteristics

Symbol	Parameter	DMD4523E	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	3.47	°C/W

Electrical Characteristics

OFF Characteristics

 $T_A = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
BV_{DSX}	Drain-to-Source Breakdown Voltage	450	--	--	V	$V_{GS} = -10\text{V}$, $I_D = 250\mu\text{A}$
$I_{DS(OFF)}$	Drain-to-Source Leakage Current	--	--	1	μA	$V_{DS} = 450\text{V}$, $V_{GS} = -10\text{V}$
I_{GSS}	Gate-to-Source Leakage Current	--	--	20	μA	$V_{GS} = +20\text{V}$, $V_{DS} = 0\text{V}$
		--	--	-20		$V_{GS} = -20\text{V}$, $V_{DS} = 0\text{V}$

ON Characteristics

 $T_A = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$R_{DS(ON)}$	Static Drain-to-Source On-Resistance	--	--	2	Ω	$V_{GS} = 0\text{V}$, $I_D = 1\text{A}^{[4]}$
$V_{GS(OFF)}$	Gate-to-Source Cut-off Voltage	-1.7	--	-4.0	V	$V_{DS} = 3\text{V}$, $I_D = 8\mu\text{A}$
gfs	Forward Transconductance	--	3100	--	mS	$V_{DS} = 5\text{V}$, $I_D = 1\text{A}^{[4]}$

Dynamic Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
C_{ISS}	Input Capacitance	--	1.11	--	pF	$V_{GS} = -7\text{V}$ $V_{DS} = 25\text{V}$ $f = 1.0\text{MHz}$
C_{OSS}	Output Capacitance	--	62.80	--		
C_{RSS}	Reverse Transfer Capacitance	--	6.54	--		
Q_G	Total Gate Charge	--	158.82	--	nC	$V_{GS} = -6\text{V} \sim 0\text{V}$ $V_{DD} = 25\text{V}$ $I_D = 200\text{mA}$
Q_{GS}	Gate-to-Source Charge	--	58.26	--		
Q_{GD}	Gate-to-Drain (Miller) Charge	--	50.55	--		

Resistive Switching Characteristics

Essentially independent of operating temperature

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions
$t_{d(on)}$	Turn-on Delay Time	--	5.71	--	ns	$V_{GS} = -6\text{V} \sim 0\text{V}$ $V_{DD} = 25\text{V}$ $I_D = 200\text{mA}$ $R_G = 10\Omega$
t_{rise}	Rise Time	--	18.45	--		
$t_{d(off)}$	Turn-off Delay Time	--	26.40	--		
t_{fall}	Fall Time	--	18.46	--		

Source-Drain Diode Characteristics

 $T_A = 25^\circ\text{C}$ unless otherwise specified

Symbol	Parameter	Min.	Typ.	Max.	Units	Test Conditions
V_{SD}	Diode Forward Voltage	--	0.8	1.5	V	$I_{SD} = 200\text{mA}^{[4]}$, $V_{GS} = -10\text{V}$

NOTE:

[1] $T_J = +25^\circ\text{C}$ to $+150^\circ\text{C}$

[2] Repetitive rating, pulse width limited by maximum junction temperature.

[3] The test is based on JEDEC EIA/JESD22-A114(HBM).

[4] Pulse width $\leq 380\mu\text{s}$; duty cycle $\leq 2\%$.

Typical Characteristics

Figure 1. Maximum Power Dissipation vs. Case Temperature

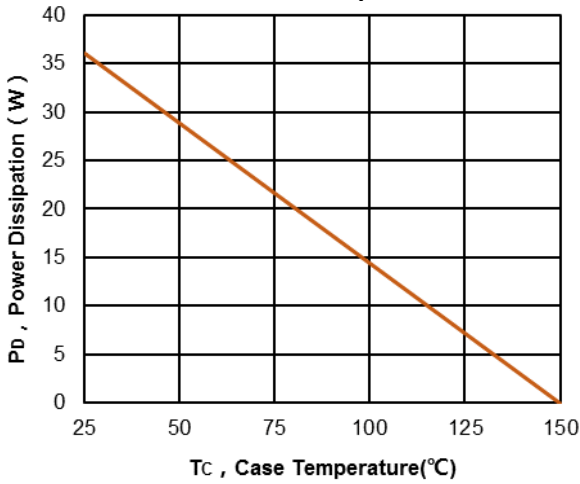


Figure 2. Maximum Continuous Drain Current vs. Case Temperature

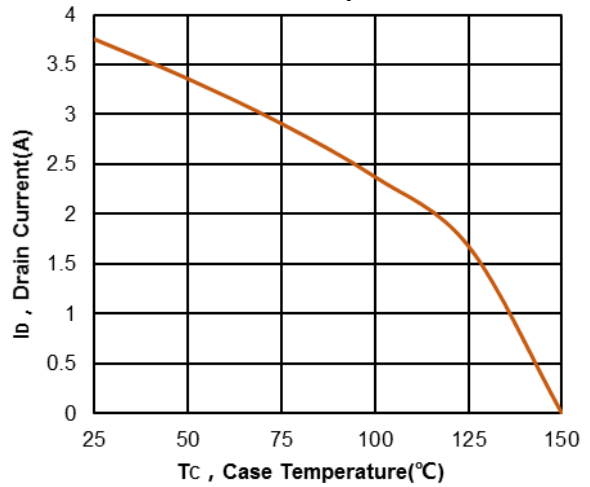


Figure 3. Typical Output Characteristics

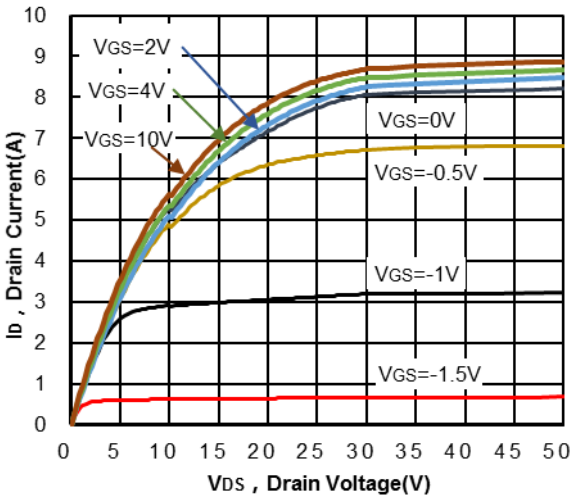


Figure 4. Typical Transfer Characteristics

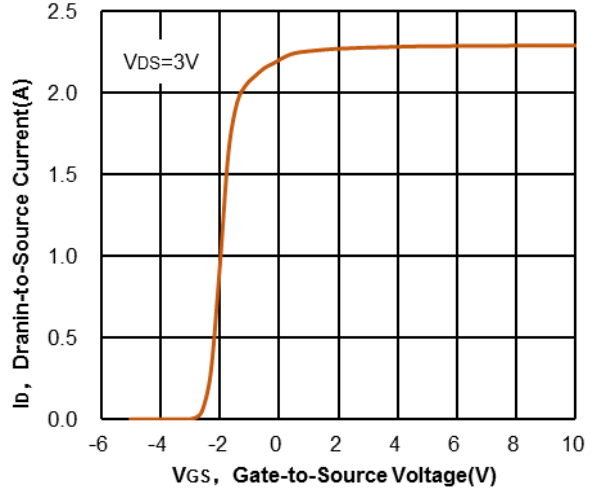


Figure 5. Typical Capacitance vs. Drain-to-Source Voltage


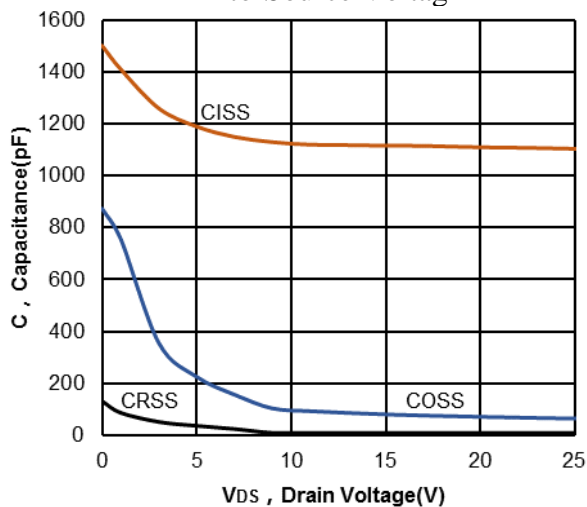


Figure 6. Maximum Rated Safe Operating Area

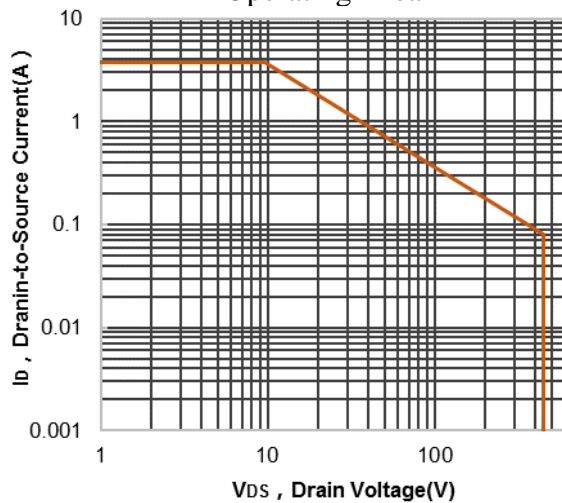

Typical Application

In circuits of capacitive loads, instruments, and communication equipment, using DMD4523E can effectively suppress transient surges and provide overcurrent protection. As shown in Figure 7, In the circuit, only one depletion mode MOSFET and a resistor are used to limit the magnitude of the current flowing through the load and provide overcurrent protection. The application of DMD4523E has the characteristics of fast response speed, simple circuit structure and low cost.

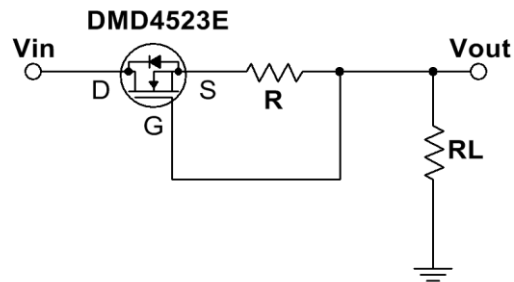


Figure 7. The DMD4523E is used for current limiting

In Figure 8, by selecting an appropriate Zener diode VD1, a stable output voltage Vout can be obtained. The DMD4523E can work under higher voltage, it can provide overvoltage protection and transient surge suppression for the load.

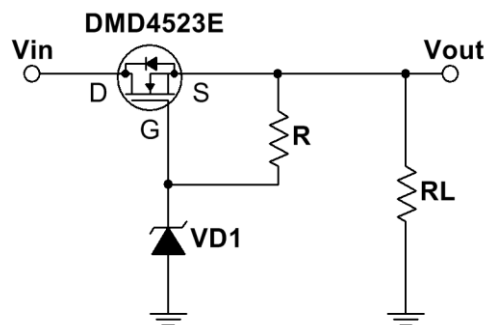
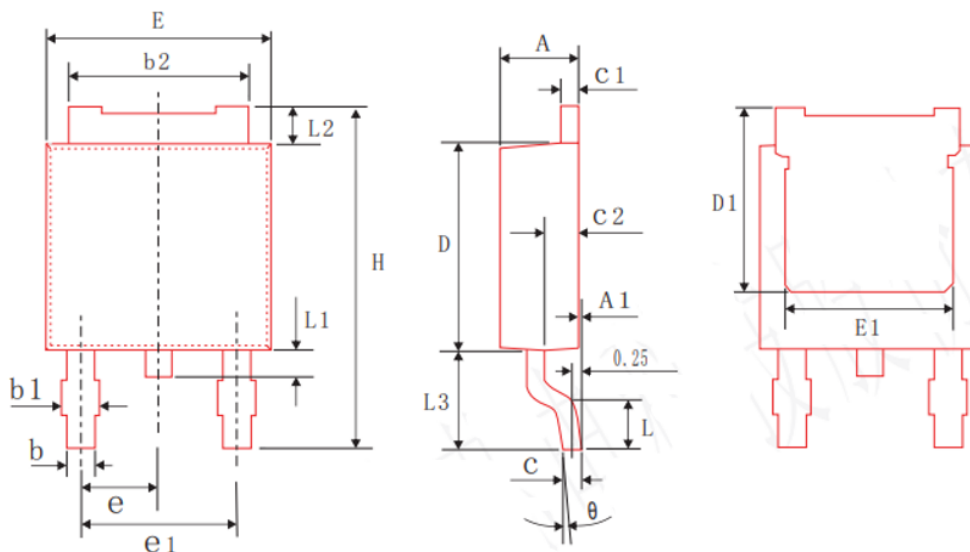


Figure 8. The DMD4523E for overcurrent and overvoltage protection

Package Dimensions
TO-252


SYMBOL	MIN	NOM	MAX
A	2.2	2.3	2.4
A1	0.00	0.05	0.10
b	0.762	0.812	0.862
b1	--	--	1.10
b2	5.23	5.33	5.43
c	0.458	1.508	0.558
c1	0.458	0.508	0.558
c2	0.80	1.00	1.20
D	6.00	6.10	6.20
D1	5.25	5.45	5.65
H	10.00	10.10	10.20
E	6.50	6.60	6.70
E1	4.75	4.85	4.95
e1	4.37	4.57	4.77
L	--	--	1.45
L1	0.60	0.75	0.90
L2	0.90	1.10	1.30
L3	2.80	3.00	3.20
θ	0°	4°	8°
e	2.285 BSC		

Published by**ARK Microelectronics Co., Ltd.****ADD: D26,UESTC National Science Park No. 1 Shuangxing Avenue, Chengdu, Sichuan.****All Rights Reserved.****Disclaimers**

ARK Microelectronics Co., Ltd. reserves the right to make change without notice in order to improve reliability, function or design and to discontinue any product or service without notice. Customers should obtain the latest relevant information before orders and should verify that such information is current and complete. All products are sold subject to ARK Microelectronics Co., Ltd's terms and conditions supplied at the time of order acknowledgement.

ARK Microelectronics Co., Ltd. warrants performance of its hardware products to the specifications at the time of sale, Testing, reliability and quality control are used to the extent ARK Microelectronics Co., Ltd deems necessary to support this warrantee. Except where agreed upon by contractual agreement, testing of all parameters of each product is not necessary performed.

ARK Microelectronics Co., Ltd. does not assume any liability arising from the use of any product or circuit designs described herein. Customers are responsible for their products and applications using ARK Microelectronics Co., Ltd's components. To minimize risk, customers must provide adequate design and operating safeguards.

ARK Microelectronics Co., Ltd. does not warrant or convey any license either expressed or implied under its patent rights, nor the rights of others. Reproduction of information in ARK Microelectronics Co., Ltd's data sheets or data books is permissible only if reproduction is without modification or alteration. Reproduction of this information with any alteration is an unfair and deceptive business practice. ARK Microelectronics Co., Ltd is not responsible or liable for such altered documentation.

Resale of ARK Microelectronics Co., Ltd's products with statements different from or beyond the parameters stated by ARK Microelectronics Co., Ltd. for the product or service voids all express or implied warranties for the associated ARK Microelectronics Co., Ltd's product or service and is unfair and deceptive business practice. ARK Microelectronics Co., Ltd is not responsible or liable for any such statements.

Life Support Policy:

ARK Microelectronics Co., Ltd's products are not authorized for use as critical components in life devices or systems without the expressed written approval of ARK Microelectronics Co., Ltd.

As used herein:

1. Life support devices or systems are devices or systems which:
 - a. are intended for surgical implant into the human body,
 - b. support or sustain life,
 - c. whose failure to perform when properly used in accordance with instructions for used provided in the labeling, can be reasonably expected to result in significant injury to the user.
 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.
-